



Paint & Primer In One Interior Eggshell Finish

DESCRIPTION

A premium interior acrylic paint that is designed to meet the highest expectations of the most demanding consumer. This low odor, zero VOC, environmentally friendly product is Asthma & Allergy and Master Painter Institute certified

FORMULA ANALYSIS

Resin Type – 100% Acrylic

Sheen/Type Finish: 9-14 @60° / Eggshell

Weight per Gallon = 11 lbs /gal ± .2

Percent Solids by Weight = 55.57 % ± 2%


Percent Solids by volume = 38.33 % ± 2%

Viscosity Range = 90-100 KU

V.O.C. = Less than 5 gm/L 0.04 lbs/gal

Coverage = 250-400 sq. ft. per gallon.

MPI Certification - # 52

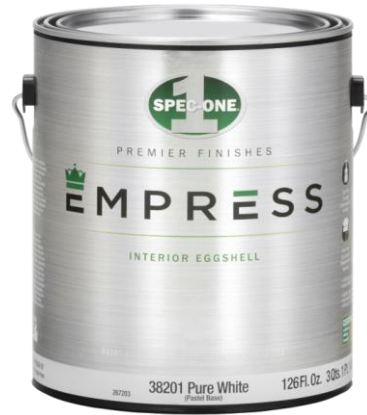

PRODUCT FEATURES

- High Hiding Formula
- Exceptional Durability
- Superior Fade Resistance
- Stain & Mildew Resistant
- Scrubbable
- Low Odor
- Zero VOC

Colors & Tinting

White
Pastel Base
Tint Base
Deep Base
Neutral Base

RECOMMENDED USE:

Previously painted or properly prepared and primed interior surfaces. This product is Asthma & Allergy and Master Painter Institute certified.

THINNING: Thin sparingly with water if necessary for spray application use .015 - .019 spray tip.

DRY TIME: Dries to the touch in 1-2 hours at 77° and 50% humidity. Recoat if necessary after 4 hours. High humidity or low temperature may increase dry time. After 2-4 weeks, cured paint may be cleaned with a mild, non-abrasive liquid detergent. Darker colors may require additional dry time between coats. Dry Paint film is mildew resistant.

COVERAGE: 250-400 sq.ft. per gallon depending on the porosity of the surface to be painted.

CLEAN UP: Wash tools with warm water and soap immediately after applying.

Properly dispose of all soiled rags. To recycle or properly dispose of paint in your community, call 1-800-CLEANUP (USA only)

STORAGE: Protect unused product from freezing.

APPLICATION METHODS:

- Do not apply over a surface that has not been thoroughly prepared.
- Stir thoroughly before and during use. Intermix all containers for color uniformity.
- Use a premium nylon/polyester brush, 3/8" nap roller cover or pad applicator.
- Do not over spread.
- For best performance; apply two coats on new surfaces after priming.